

opta



Opta meets the typical needs of office and public interiors – low glare and high luminous flux. When you add minimalist aesthetics and refined design, you get a recipe for the perfect tool for building an ergonomic and visually friendly space. The range consists of surface-mounted and suspended luminaires in the form of rectangles with asymmetrically arranged light modules and symmetrical squares. An optical PMMA lens assembly directs light at two angles of 50° and 80° – always with a high (CRI90) colour rendering index. Available colour temperature values: 2700°K, 3000°K, and 4000°K. The glare factor of UGR <19 makes this range suitable for workplaces where screens are used.

The Opta Disk version is a discreet adjustable spotlight available in both recessed and surface-mounted versions. It should be noted that the height of the NT model is only 30mm and the discs offer 25° tilt range, which makes it one of the lowest luminaires of its kind on the market.



KAMA MUCHA

opta




opta grid X4 Q INT


opta grid

opta


Opta Grid NT

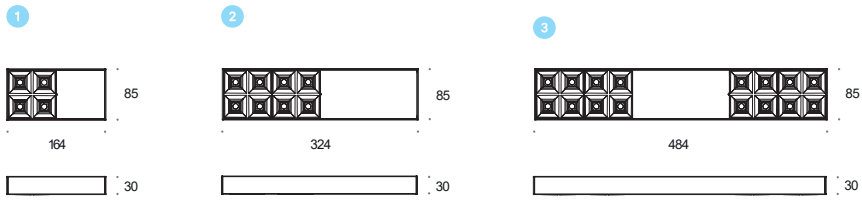


Opta Grid NT

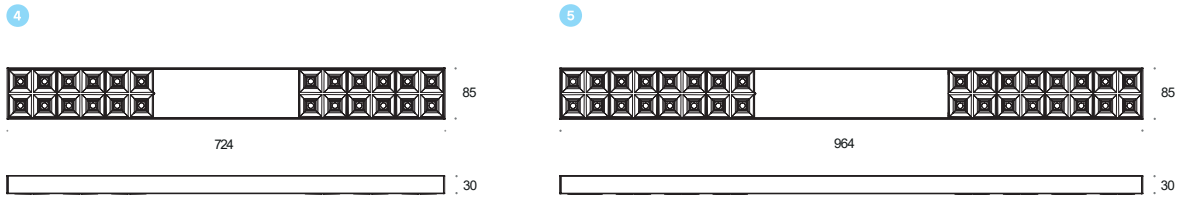


Opta Grid NT

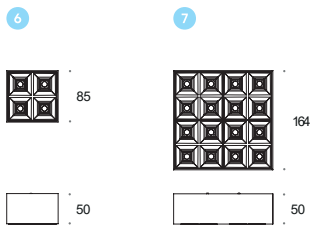

Opta Grid Z/W

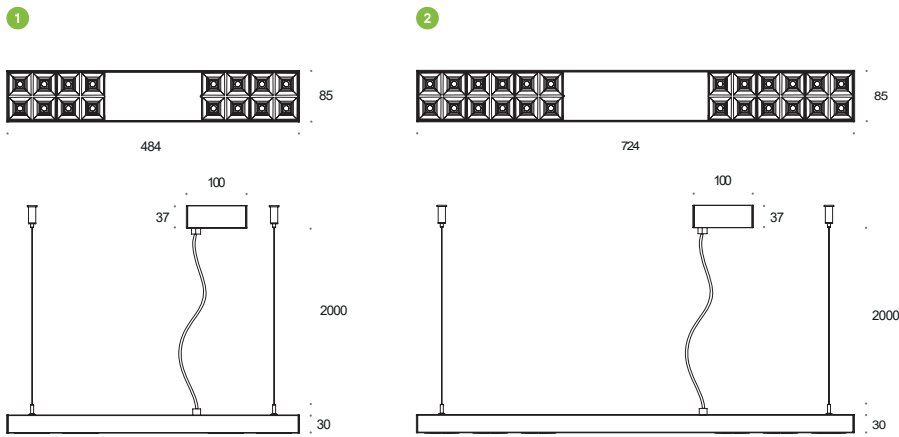


Opta Grid Z/W

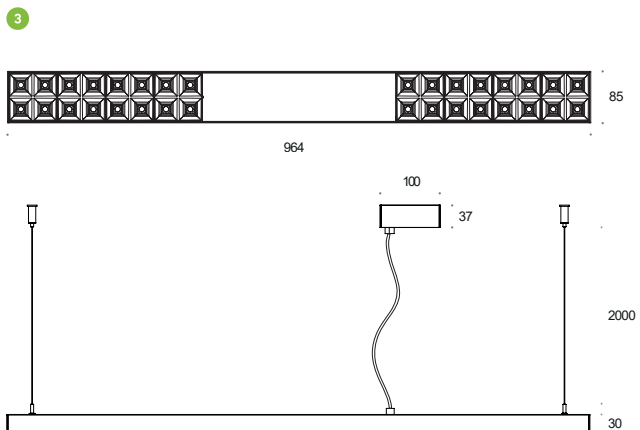

Model		On—Off	Switch DIM	DALI2	PhaseOut	Accessories	White + Black	Black	White	Mixed	CR88-2700K	CR88-3000K	CR88-4000K	Wide 53°	X-Wide 85°
Opta Grid NT ⊕															
1	X1NT	9.6W870lm	3.3340												
2	X2NT	18W1730lm	3.3341	3.3343	3.3342										
3	X4NT	19W1180lm	3.3344	3.3346	3.3345										
4	X6NT	26W1780lm	3.3347												
5	X8NT	34W2370lm	3.3348	3.3350	3.3349	1									
6	X1QNT	9.6W870lm	3.3351			1									
7	X4QNT	19W1180lm	3.3352	3.3354	3.3353										
Opta Grid ZW ⊕															
1	X4ZW	19W1180lm	5.3355	5.3357	5.3356										
2	X6ZW	26W1780lm	5.3358												
3	X8ZW	34W2370lm	5.3359	5.3361	5.3360										
Opta Disk NT ⊕															
1	Opta Disk X1NT	10W810lm, 49°	3.3635			3.3636									
2	Opta Disk X2NT	19W1620lm, 49°	3.3637	3.3638	3.3639	3.3640									
Opta Disk WP ⊕															
1	Opta Disk Round WP	10W810lm, 49°	4.3641	4.3642	4.3643	4.3644									
2	Opta Disk X1WP	10W810lm, 49°	4.3645	4.3646	4.3647	4.3648									
3	Opta Disk X2WP	19W1620lm, 49°	4.3649	4.3650	4.3651	4.3652									
4	Opta Disk X1 Mounting Frame	[required]													4.3653
5	Opta Disk X2 Mounting Frame	[required]													4.3654

● CR80

energy
pg. str. 17

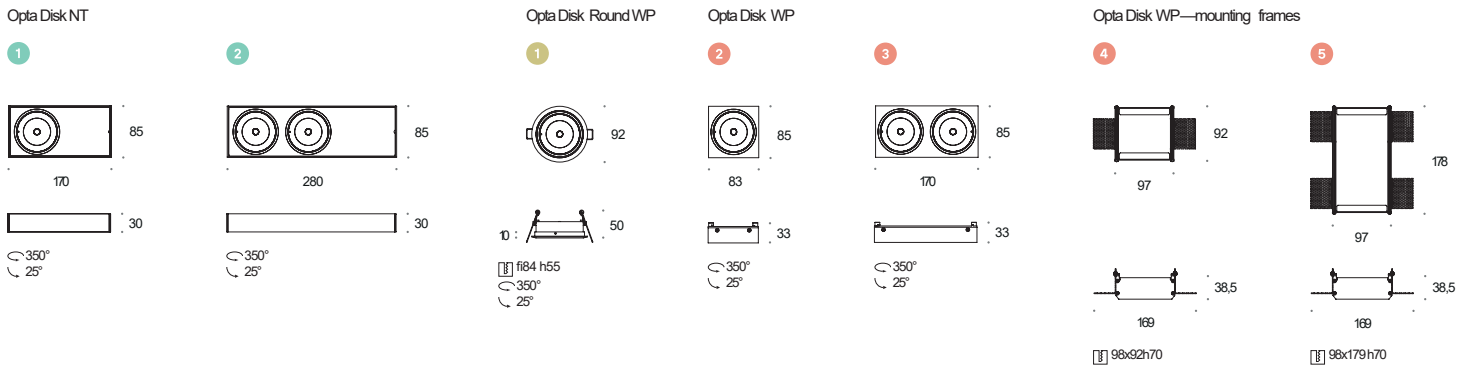

details subject to change.