


Specification sheet

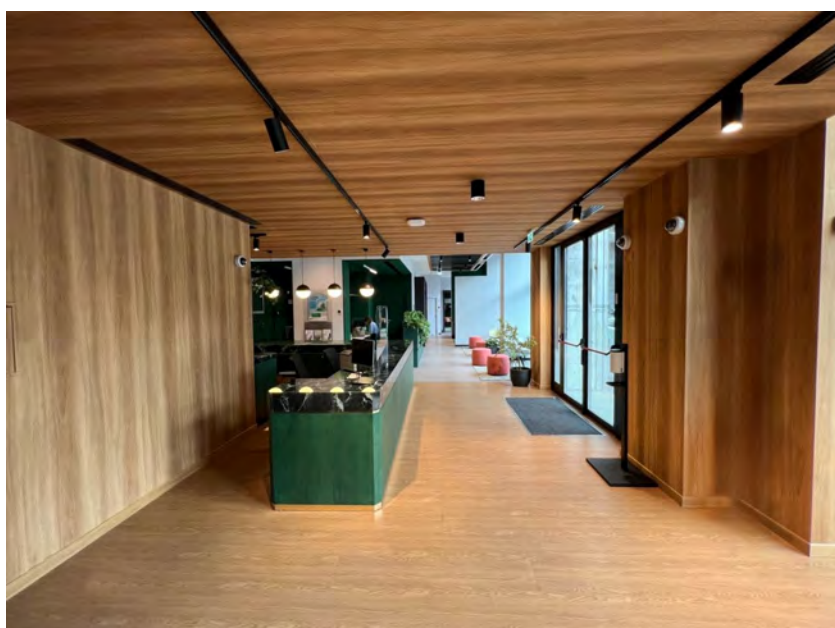

Specification sheet

F25B

TECHNICAL FEATURES


Alimentazione Power supply	220VAC
Consumo Power consumption	20W
Correzione del fattore di potenza Power factor correction	>0,95
Efficienza corpo Delivered lumen	115 lm/W
Flusso luminoso Luminous flux (3000K)	2300 lm
Durata LED L70B20 conforme TM21 Led lifetime L70B20 TM21 compliant	>75.000 h
Angolo del fascio luminoso Luminous beam width	36°
Colore luce bianca (2 step Mac Adam) CCT	3000K/4000K
CRI	90
UGR	<19
Colore della cornice lampada Lamp frame color	Bianco/Nero White/Black
Temperatura di esercizio Ambient operating temperature	-20...+35°C
Temperatura di stoccaggio Storage temperature	-20...+60°C
Dimensioni Dimensions	Ø 80 x 215 mm
Tenuta IP IP Grade	IP44
Peso Weight	350 gr

Codifica prodotti - Product Coding

F25B 30 B
 a b

a CCT: 30 = 3000K, 40 = 4000K

b Body colour: B = Black, W = White



Light beam 36°

