




Luminaire designed for flush installation on floors in outdoors and indoors areas. Suitable for power LED sources. Its body is made of aluminum submitted to anodizing treatment up to 18 micron and stainless steel. Front diffuser in extra clear tempered glass, subjected to a specific anti-stain sandblasting treatment, is integral to the body through a special glue-sealant used in shipbuilding. The snap-in installation of the devices is allowed through the mounting of stainless steel AISI 304 casing. All the metal component of the luminaires of this series can be fully made of stainless steel AISI 316L, on request to ensuring full lasting stability even in presence of salt fog. It has anti-vandal stainless steel springs that make the device particularly suitable for installation in public and private areas. The device is removable via dedicated disassembly key to be ordered separately. The luminaire is available in IP67 230Vac DALI dimmable and IP68 24Vdc. It is equipped with 0,5m long neoprene cable for connection to the power supply line, through appropriate waterproof connection systems not included.



CERCHIO

DISEGNO TECNICO/TECHNICAL DRAWING

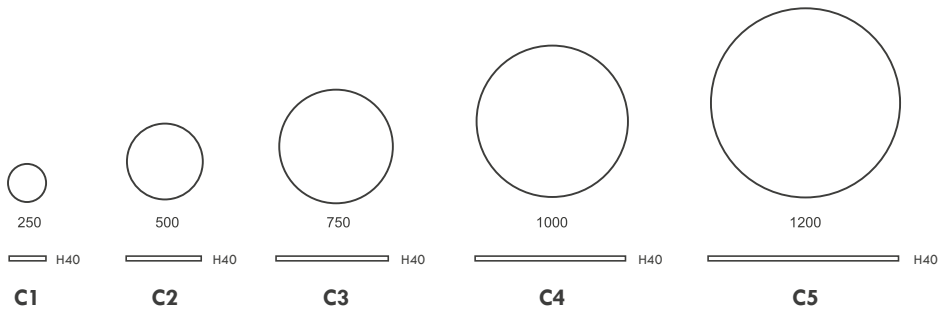

CERCHIO

modello/model	codice/code	sorgente/lamp	lumen/lumens		
			2700K	3000K	4000K
C1 - IP 67*	07.103817	LED 15W	1188	1250	1375
C2 - IP 67*	07.103816	LED 30W	2375	2500	2750
C3 - IP 67*	07.103815	LED 45W	3572	3760	4136
C4 - IP 67*	07.103880	LED 60W	4769	5020	5522
C5 - IP 67*	07.103881	LED 76W	6033	6350	6985
C1 - IP 68**	07.103849	LED 15W	1188	1250	1375
C2 - IP 68**	07.103848	LED 30W	2375	2500	2750
C3 - IP 68**	07.103847	LED 45W	3572	3760	4136
C4 - IP 68**	07.103907	LED 60W	4769	5020	5522
C5 - IP 68**	07.103908	LED 76W	6033	6350	6985

ACCESSORI/ACCESSORIES

Cotrocassa IP20 / IP20 Housing

codice/code	modello/version	dimensioni/sizes
20.103934	C1	Ø258xH100
20.103935	C2	Ø508xH100
20.103936	C3	Ø758xH100
20.103937	C4	Ø1008xH100
20.103938	C5	Ø1208xH100

Cotrocassa IP68 / IP68 Housing

codice/code	modello/version	dimensioni/sizes
20.103992	C1	Ø258xH100
20.103993	C2	Ø508xH100
20.103994	C3	Ø758xH100
20.103995	C4	Ø1008xH100
20.103996	C5	Ø1208xH100

Kit utensili estrazione sorgente /
lighting source extraction tool kit



20.104520



FINITURA/FINISH

colore/colour codice/code

	.60 / vetro sabbato sandblasted glass
	A1 / vetro antiscivolo antislippery glass

ESEMPIO COMPOSIZIONE CODICE / EXAMPLE OF CODE COMPOSITION

*Versione 230VAC DALI IP67/IP67 DALI 230VAC Version

Alimentatore elettronico 220/240V DALI 50-60Hz integrato nel corpo dell'apparecchio. Sistemi di connessione da ordinare come accessori./

Electronic driver DALI 220/240V 50-60Hz integrated in the luminaire's body. Connection systems to be ordered as accessories.

07.103817.60.DA.DI.BF



Fascio luminoso/Light beam

.DI diffuso/diffuse

Colore LED/LED Colour

.BC 2700K

.BP 3000K

.BF 4000K

Tecnologia di comunicazione/
Communication Technology

.DA DALI


.00 ON/OFF

**Versione 24VDC IP68/IP68 24VDC Version

Alimentatore elettronico 24VDC e sistemi di connessione da ordinare come accessori. Elettroniche di controllo: iSmart CV, iColor CV o iDimm CV, da ordinare come accessorio./

24VDC Electronic driver and connection systems to be ordered as accessories. Control Electronics: iSmart CV, iColor CV or iDimm CV, to be ordered as an accessory.

07.103849.60.DI.BF



Fascio luminoso/Light beam

.DI diffuso/diffuse

Colore LED/LED Colour

.BC 2700K

.BP 3000K

.BF 4000K

